


VISIFLON

PTFE Hose for Automotive and General Purpose Applications

Convoluted PTFE Liner Tube for improved Flexibility in Larger Bore Sizes

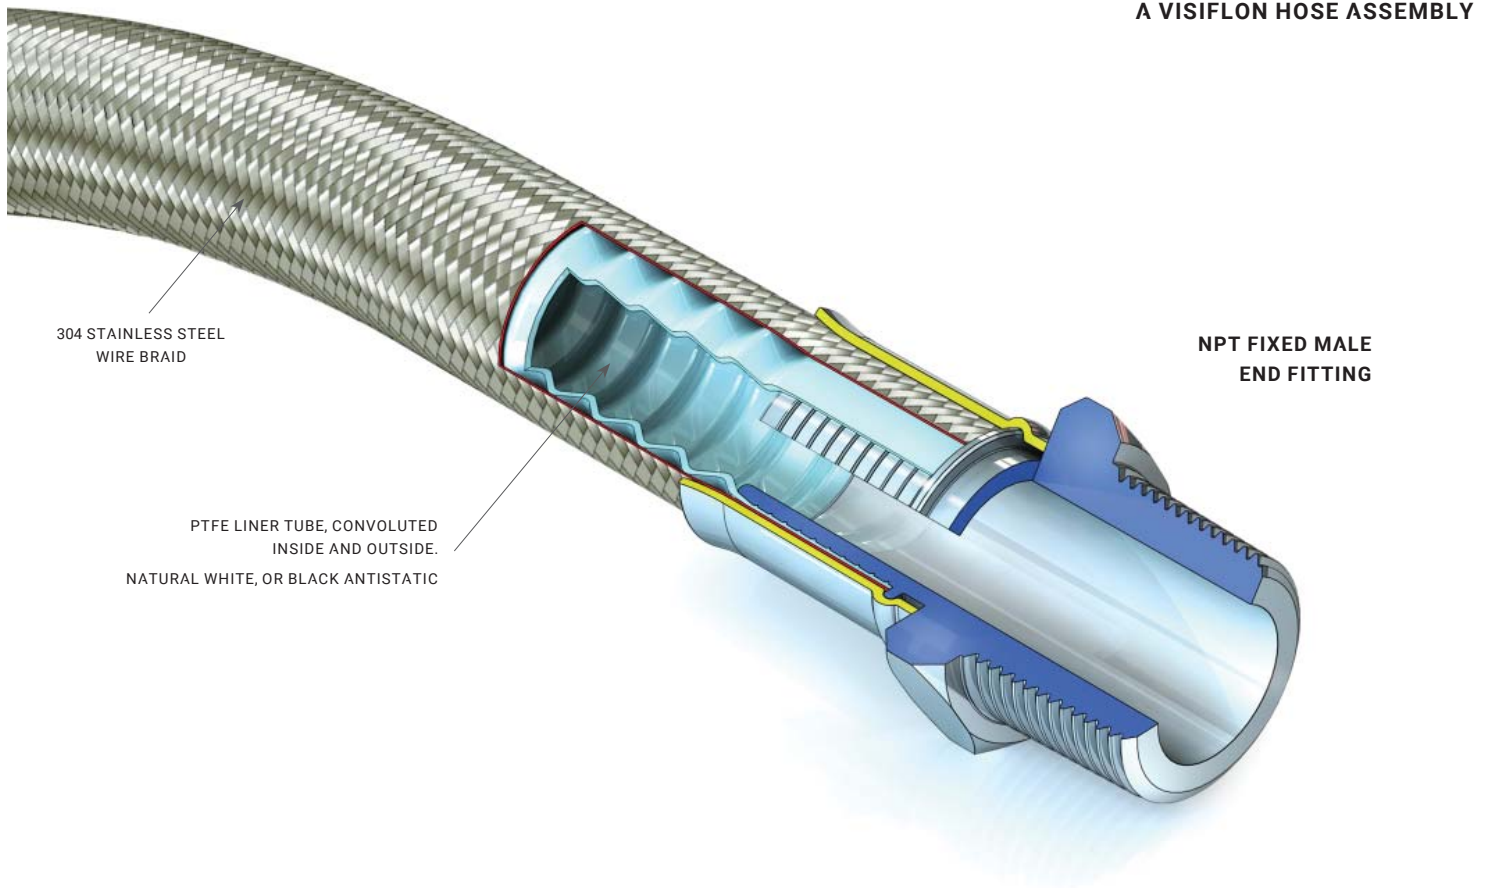

VISIFLON HOSE SPECIFICATIONS

HOSE BORE SIZE RANGE -

$\frac{3}{8}$ " (9MM) UP TO 2" (50MM)

HOSE LENGTHS -

UP TO 1", 20 METRES (70 FEET). $1\frac{1}{4}$ " TO 2", 15 METRES (50 FEET)

TEMPERATURE LIMITS -

-73°C (-100°F) TO +230°C (450°F)

WORKING PRESSURE RATINGS -

$\frac{3}{8}$ " (9.5MM) = 60 BAR (870 PSI) TO 2" (50MM) = 15 BAR (220 PSI)

VACUUM LIMITATIONS -

VACUUM RESISTANT TO -0.9 BAR FOR ALL SIZES, UP TO 130°C (266°F)

END FITTINGS - *Standard design only for:*

BSPT AND NPT MALE AND FEMALE, BSP AND NPSM 60° CONE SEAT AND FLAT SEAT FEMALE UNIONS, JIC THREADED MALE AND FEMALE FITTINGS, STANDPIPE FITTINGS AND MANY MORE

ALTERNATIVE DESIGN OPTIONS *(to special order)* -

- ORANGE POLYPROPYLENE YARN BRAID
- BLACK, ANTISTATIC PTFE LINER TUBE

APPROVALS -



ISO 9001, TS16949, ISO 14001, FDA (MATERIALS), USP 6, AND MANY MORE - SEE BROCHURE

FOR THE FULL VISIFLON HOSE BROCHURE PLEASE VISIT - WWW.AFLEX-HOSE.COM

UK +44 (0)1422 317200 USA 215 766 1455

VISIFLON

PTFE Hose for Automotive and General Purpose Applications

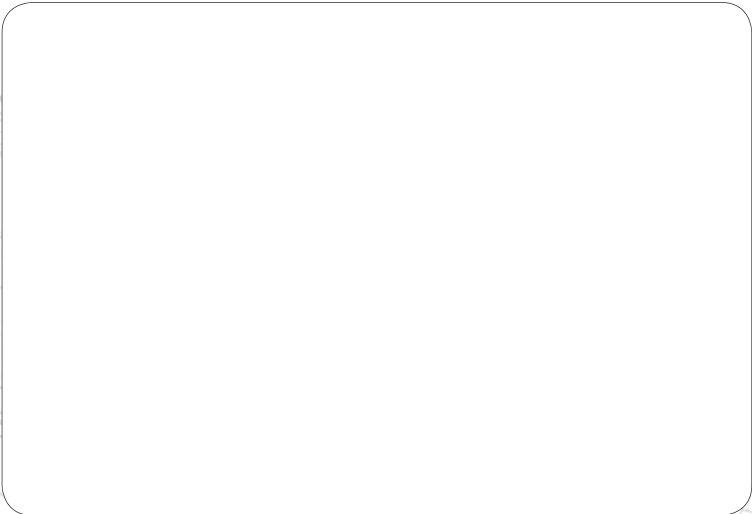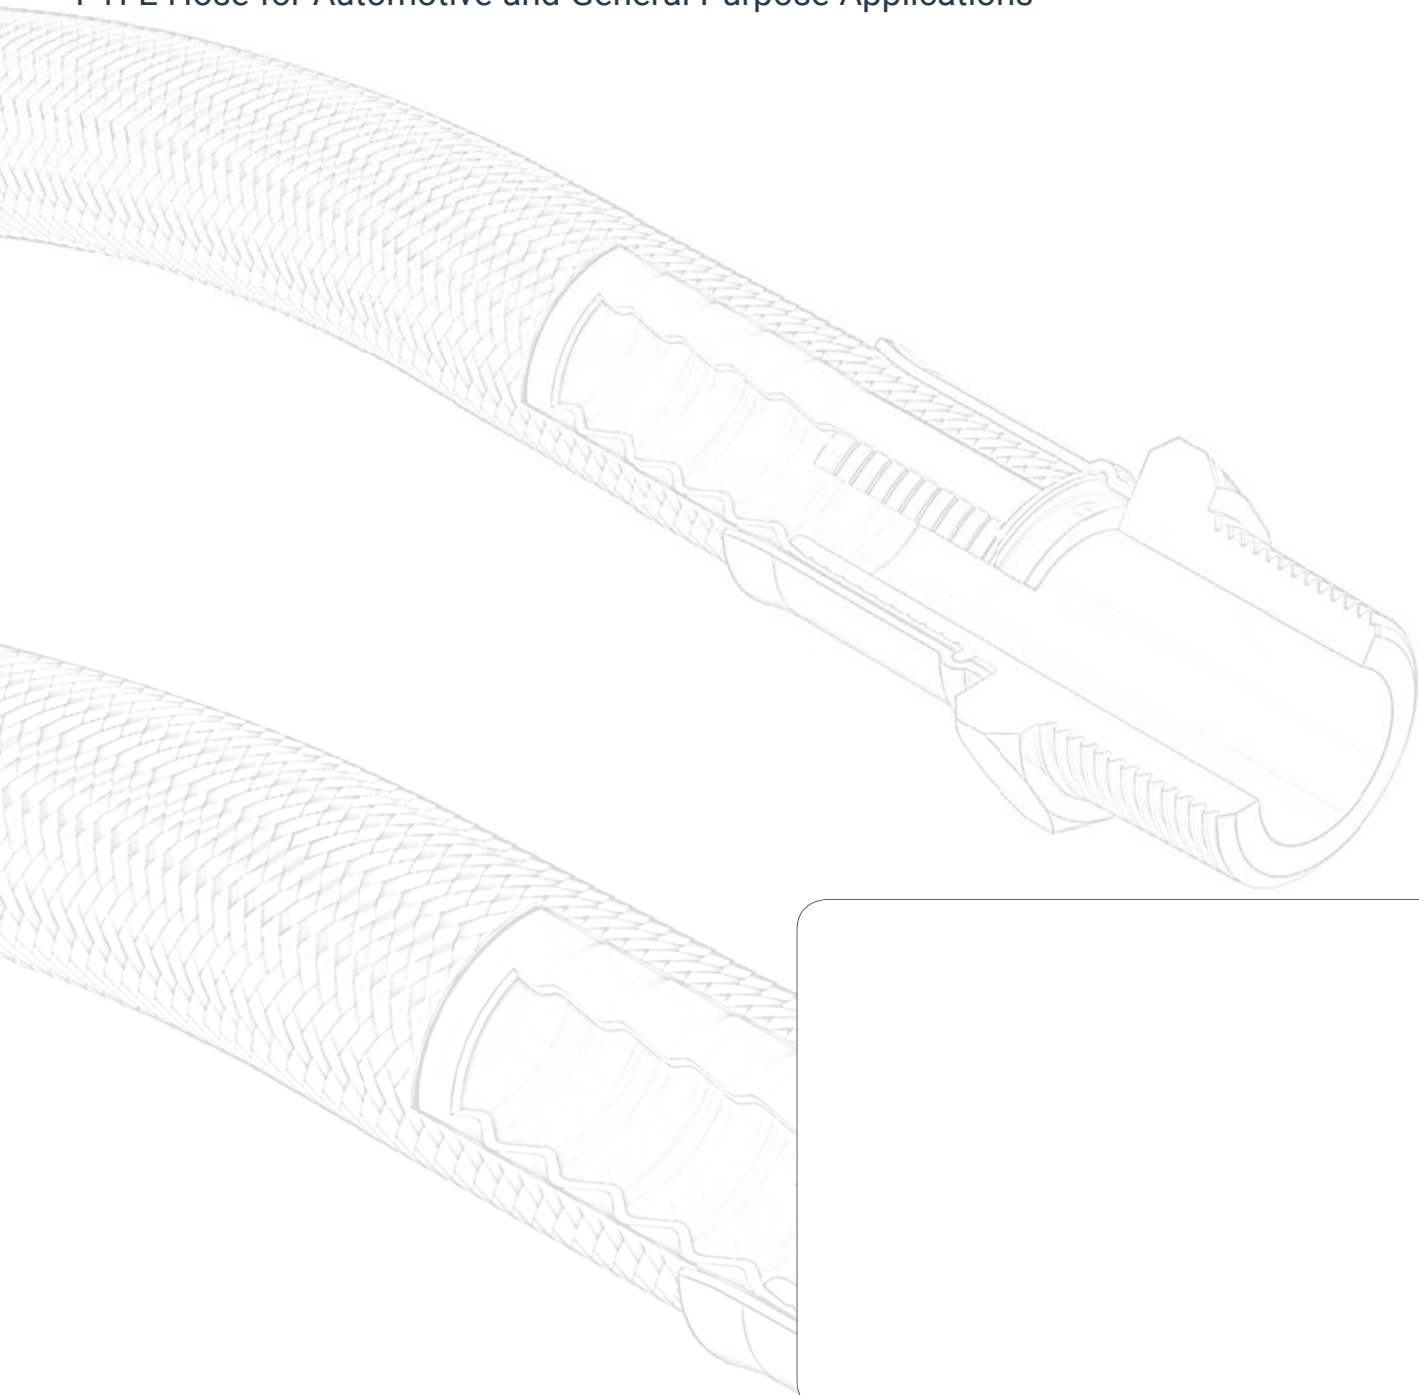

USA VIS/15.06.17 Rev 4



Aflex Hose is part of the Watson-Marlow Fluid Technology Group. A Spirax-Sarco Engineering Company

UK

Spring Bank Industrial Estate
Watson Mill Lane
Sowerby Bridge
Halifax
West Yorkshire, HX6 3BW
Tel: +44 (0) 1422 317200
Fax: +44 (0) 1422 836000

USA

32 Appletree Lane
Pipersville
Bucks County
Pa 18947
Tel: 215 - 766 - 1455
Fax: 215 - 766 - 1688



WWW.AFLEX-HOSE.COM

